

8

7

6

5

4


3

2

1

Rear Axle Spacing for a 13" Paddle, Engine In.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	06-102	2" x 57" Standard Splined Rear Axle	1
2	061-025	1/4" Long 2" Axle Spacer	6
3	061-0500	1/2" Axle Spacer, Flat	7
4	061-0125	1/8" Long 2" Axle Spacer	2
5	05-1204-K	2" Bearing Carrier with .50" Spacers, M2 Bearing	1
6	06-132	2" Axle Nut, Right Hand Thread 2-1/4" Hex	1
7	25-605	2" Rear Wheel Center	2
8	061-350	3-1/2" long 2" Axle Spacer	4
9	061-150	1-1/2" long 2" Axle Spacer	1
10	061-100	1" long 2" Axle Spacer	1
11	061-095	.950" Wide x 2" Rear Axle Spacer	1
12	08-760	Sprocket Bolt Kit	1
13	06-114	2" Splined Bearing Reducer	3
14	06-134	2" Axle Nut, Left Hand Thread 2-1/4" Hex	1
15	06-142Ti	Titanium Brake Rotor	1
16	06-143	6 Bolt Brake Rotor Bolt Kit	1
17	06-1061M	2" Brake Floater for 2-Piston Caliper, M2 Bearing	1
18	06-12501M	2" Jacob's Jacker Std. Long, M2 Bearing	1
19	061-0751	Radiused 3/4" x 2" Inner Axle Spacer for 2" Rear Axle	2
20	06-137	Split Spacer, Male, 2" rear axle	2
21	06-136	Split Spacer, Female, 2" Rear Axle	2
22	06-302	2" Sprocket Carrier for 5/16"-18 Bolts	2

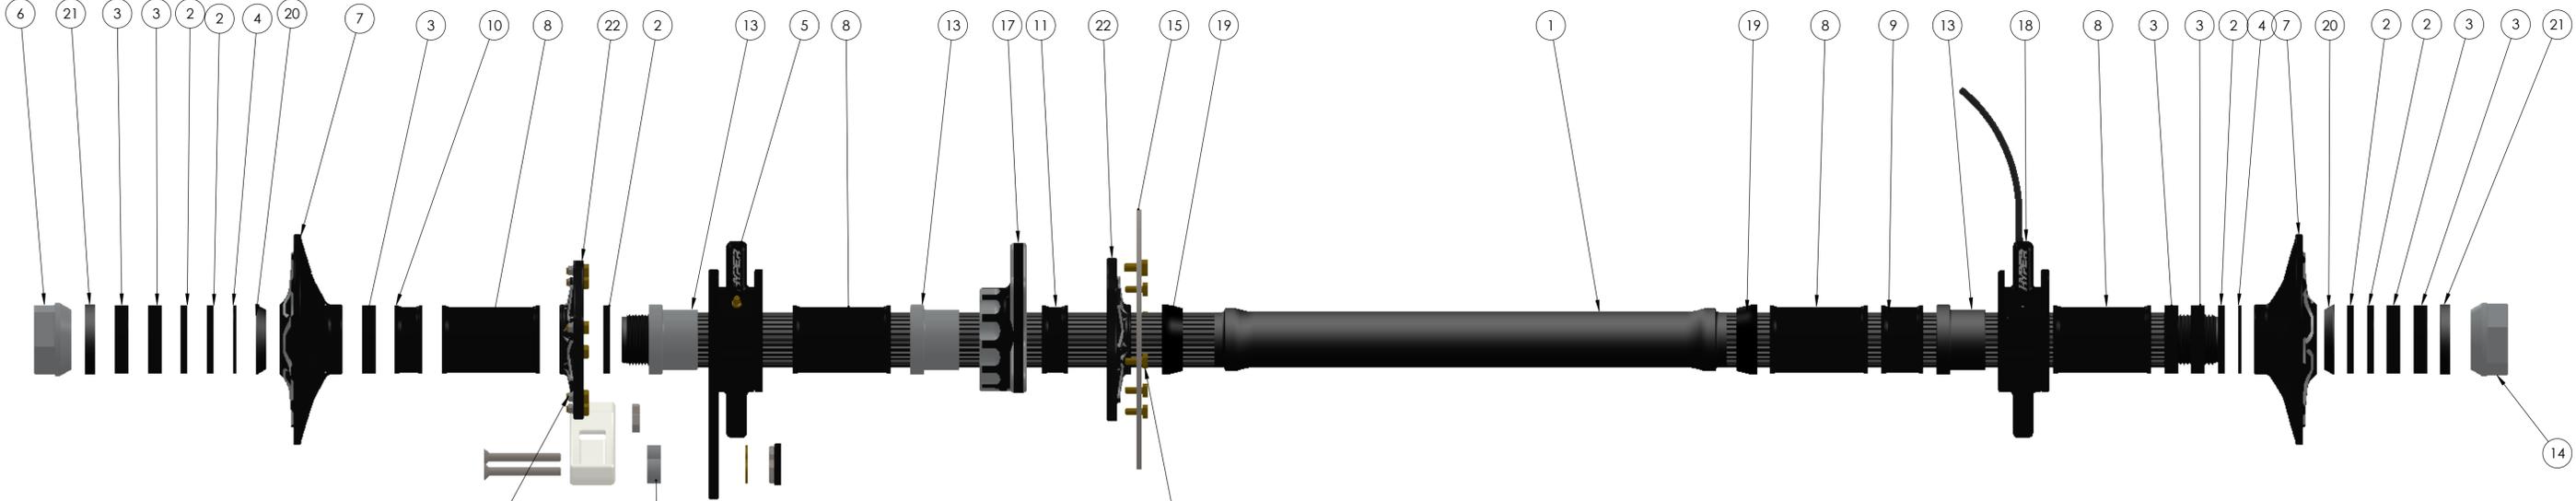

12 Use spacers to center chain, size as needed.
 On our House Cars, we dont use any spacers
 We run the engine in the "IN" position.
 When doing this, leave the top back bolt out of the chain block.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 ©BERRY COMPANY NAME HERE. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 ©BERRY COMPANY NAME HERE IS
 PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES			
TOLERANCES:			
FRACTIONAL: ±	DRAWN		
ANGULAR: MACH ±	CHECKED		
BEND ±	ENG APPR.		
TWO PLACE DECIMAL ±	MFG APPR.		
THREE PLACE DECIMAL ±			
INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.		
MATERIAL	COMMENTS:		
FINISH			
NEXT ASSY	USED ON		
APPLICATION	DO NOT SCALE DRAWING		

TITLE: **2026 Hyper House Car Rear**
 SIZE DWG. NO. REV
D
 SCALE: 1:12 WEIGHT: SHEET 1 OF 1

8

7

6

5

4

3

2

1